


SAS series



Features

- Light weight and long service life with the use of corrosion-resistant material.
- Mounted at air exhaust port reduce noise effectively.
- Easy to install.

Symbol



How to Order

SAS 02 - 1

① ② ③

① Series

SAS	Plastic silencer
-----	------------------

② Port size

01	R(PT) 1/8
02	R(PT) 1/4
03	R(PT) 3/8
04	R(PT) 1/2
06	R(PT) 3/4
08	R(PT) 1

③ Option

Nil	Standard
Note)1	Small type


Note) Only for SAS02 series.

Specifications

Fluid	Compressed air
Max. working pressure	10.2kgf/cm ² (1.02MPa)
Material	Plastic Resin (PE)
Ambient & fluid temperature	5~60°C

Model	Effective area (mm ²)	Noise reduction (dB(A))	Weight (g)
SAS01	15	14	1.8
SAS02	35	18	14
SAS02-1	20	16	4
SAS03	60	22	24
SAS04	90	22	32
SAS06	200	23	66
SAS08	230	22	66

Structure & Dimensions

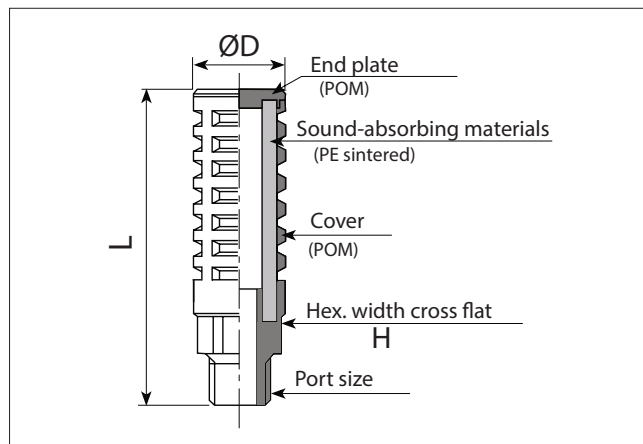

Model	Port size	L	D	H
SAS01	R(PT) 1/8	35	10	-
SAS02	R(PT) 1/4	63	22	18
SAS02-1	R(PT) 1/4	45	15	-
SAS03	R(PT) 3/8	83	25	21
SAS04	R(PT) 1/2	85	30	26
SAS06	R(PT) 3/4	102	45	33
SAS08	R(PT) 1	102	45	33