


D-P4 series

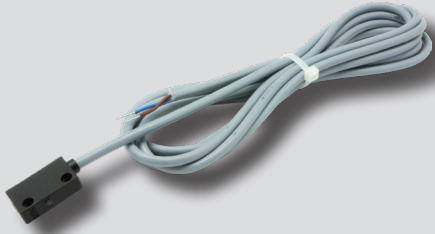


Applicable cylinder	Symbol
Bracket mounting/ CK Ø50,Ø63	

Specifications

Model	D-P4
Wiring method	2-wire non polar type
Load	Relay, PLC
Voltage	DC24V ±10%
Current range	3.5mA~40mA
Operation time	40msec
Ambient Temperature	0°C~70°C
Internal voltage drop	≤5V
Current leakage	≤0.6mA
Insulation resistance	≥100MΩ at DC 500Mega
Voltage resistance	AC1000V for 1 min.
Indicator lamp	Green / Red LED
Protection Structure	IP67
Operation distance	4~5mm
Wire length	1m (Standard)

Circuit Diagram

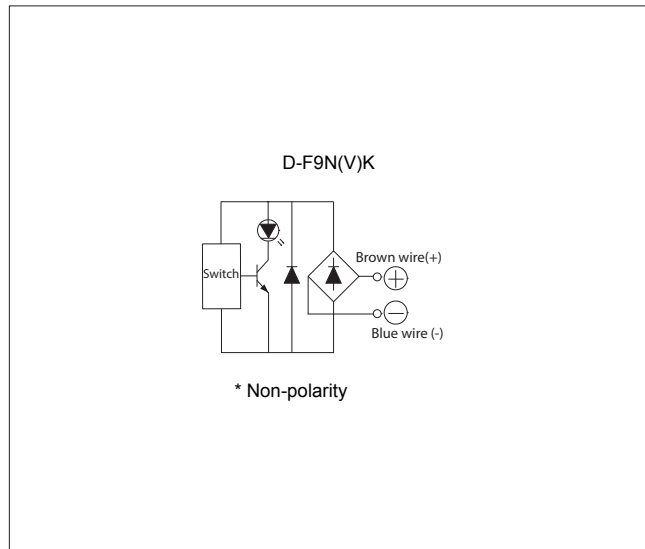

Weight

Unit: g

Model	Wire length(m)	Weight(g)
	1	100
	3	130
	5	190

Dimensions

