



SB series



SB-3B



SB-3R

Features

- Uniform vibration and easy to install
- Minimizing noise
- No risk of gas explosion by using air
- Easy vibration control

How to Order

SB - 2 B
① ②

① Body size

2	1/4 small type
3	1/4 medium type

② Vibration method

B	Ball type
R	Rotor type

Specifications


Model	SB-2B	SB-3B	SB-2R	SB-3R
Vibration frequency Hz	3kgf/cm ²	145	38	85
	4kgf/cm ²	152	44	104
	5kgf/cm ²	156	48	111
Number of rotation rpm	3kgf/cm ²	8700	2280	5100
	4kgf/cm ²	9120	2640	6240
	5kgf/cm ²	9360	2880	6660
Vibration acceleration m/s ²	3kgf/cm ²	221	41	140
	4kgf/cm ²	133	55	255
	5kgf/cm ²	156	57	257
Fluid	Air			
Operating pressure	2~9.9kgf/cm ²			

Applications


- Hopper, Silo, Bin
- Auto mixing
- Auto sorting
- Delivery system of various components and materials
- Automatic transfer system of the automation factory

Dimensions


SB-2B

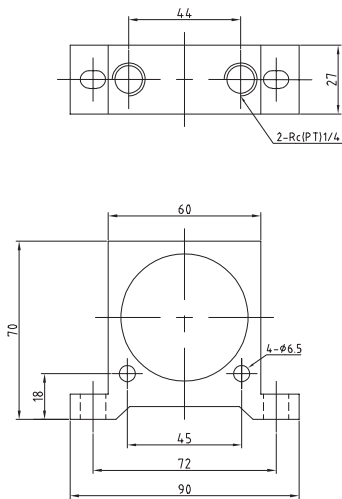

SB-3B

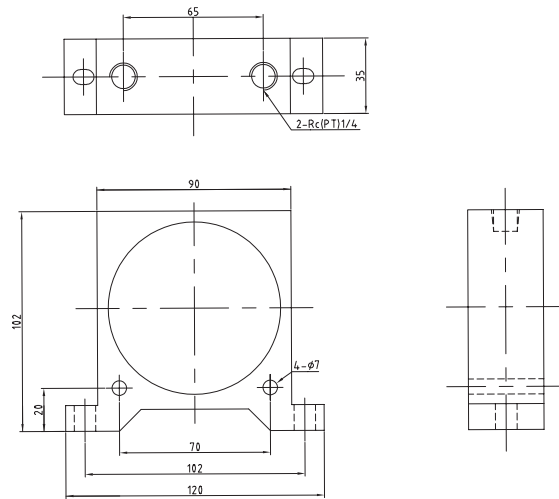

SB-2R

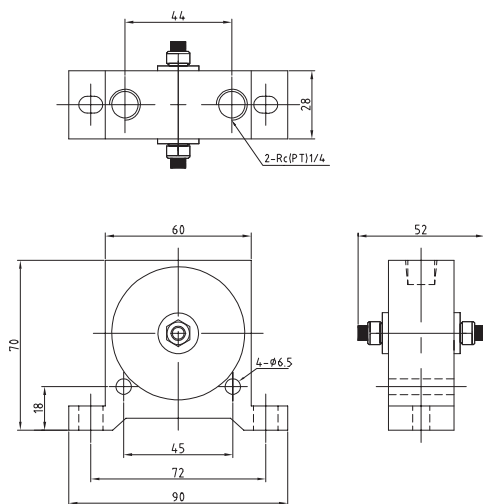

SB-3R

