


HKS2510SF, 3212SF, 4014SF, 5020SF



HKW 3212SF

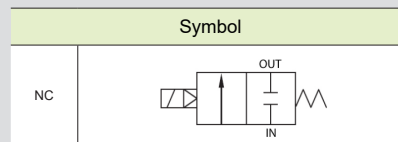

How to Order

HKS **3212** **SF** - **AC220V**

①

②

① Orifice & Port size

	Orifice
2510	Ø32
3212	Ø32
4014	Ø40
5020	Ø50

② Voltage

AC220V	AC220V 50Hz/60Hz
--------	------------------

Specifications

Classification	Standard	Option	Classification	Standard	Option
Fluid	Air, Steam, Hot water		Voltage	AC220V 50/60Hz	
Fluid temp.	0 ~ 180℃				
Ambient temp.	50℃ (Max.)				
Pressure range	0 ~ 7kgf/cm ² (0 ~ 0.7MPa)		Allowable voltage fluctuation	±10%(AC)	
Coil insulation	Class H		Power consumption	AC: 30W	
Electrical connection	Terminal box lead wire G(PF)1/2		Body material	BODY: SCS14 TRIM: SUS 304	
End connection	JIS 10K FF		Seal material	PTFE + SUS304 PISTON	FPM + SUS304 PISTON
Orifice	Ø25, Ø32, Ø40, Ø50		Weight	Refer to the table below	

※ Not available in explosive atmosphere.


Features

- Piston pilot kick type-Direct acting type
- Operate in 0kgf/cm² of differential pressure (Vacuum)
- Stainless steel body
- Fire resistant structure, large capacity
- Horizontal pipe (30° or less) installation
- Terminal box type electrical connection

Applications

- Steam piping
- Dyeing machine
- Heat exchanger
- Sterilizer
- Industrial cleaner
- Ventilator

Dimensions

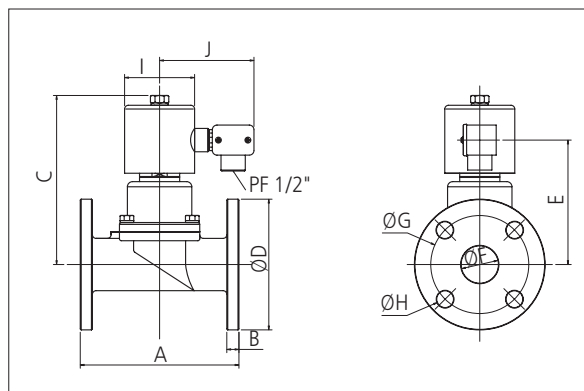

Model	A	B	C	D	E	F	G	H	I	J	Weight (kg)
HKS 2510SF	127	13	143	Ø125	104	Ø25	Ø90	Ø18	61	95	4.20
HKS 3212SF	170	13	182	Ø135	133	Ø35	Ø100	Ø19	75	102	7.40
HKS 4014SF	180	13	184	Ø140	136	Ø40	Ø105	Ø19	75	102	7.46
HKS 5020SF	180	14	189	Ø155	137.5	Ø50	Ø120	Ø19	75	102	9.34