



# HPW154-60K



HPW 154-60K

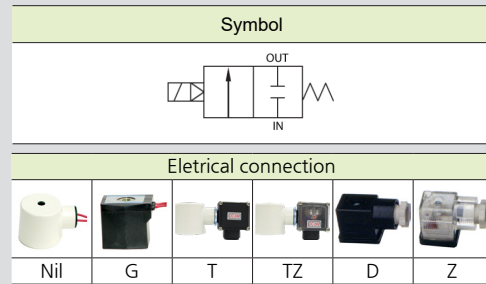

## How to Order



### ① Port type

Nil	Rc(PT) (Standard)
G	G

### ② Orifice & Port size

154	Ø12	1/2
-----	-----	-----

### ③ Electrical connection

Nil	Console box (Standard)
G	Grommet coil
T	Console box + Terminal box
TZ	Console box + Terminal box (Lamp)
D	DIN coil + DIN connector
Z	DIN coil + DIN connector (Lamp)

### ④ Rated voltage

AC110V	AC110V 60Hz
AC220V	AC220V 60Hz
DC12V	DC12V
DC24V	DC24V
AC100V	AC100V 50/60Hz
AC200V	AC200V 50/60Hz
AC110V-50Hz	AC 110V 50Hz
AC220V-50Hz	AC 220V 50Hz
AC240V-50Hz	AC 240V 50Hz
AC24V-50Hz	AC 24V 50Hz

## Specifications

Classification	Standard	Option	Classification	Standard	Option
Fluid	Air, Water, Clean oil, Inert gas		Voltage	AC100V 50/60Hz AC110V 60Hz AC200V 50/60Hz AC220V 60Hz DC24V, 12V	AC110V 50Hz AC220V 50Hz AC240V 50Hz AC 24V 50Hz
Fluid temp.	0 ~ 60°C				
Ambient temp.	50°C (Max.)				
Pressure range	0.5 ~ 60kgf/cm <sup>2</sup> (0.05 ~ 6.0MPa)		Allowable voltage fluctuation	±10%(AC), ±5%(DC)	
Coil insulation	Class B		Power consumption	AC, DC : 14W	
Electrical connection	Lead wire G(PF)1/2	Grommet coil Terminal box DIN connector	Body material	Brass	
Port size	Rc(PT) 1/2		Seal material	MC NYLON+ SUS 303 Piston	EPDM, NBR, FPM
Orifice	Ø12		Weight	1.5Kg	

## Features

- Piston pilot type
- Normally closed type
- Max. operating pressure: 60kgf/cm<sup>2</sup>
- Fire resistant structure, high durability

## Applications

- Water piping
- Medical instrument
- High pressure cleaner
- Wire cutting machine
- Compressor

## Dimensions

