

# DVU series



### Features

- Save installation space with integrated of vacuum ejector and pad.

### How to Order

DVU ① 20H ② - 125 ③ B ④ R ⑤

#### ① Series

|     |             |
|-----|-------------|
| DVU | Vacuum unit |
|-----|-------------|

#### ② Nozzle size

|     |            |
|-----|------------|
| 15H | Rc(PT) 1/4 |
| 20H | Rc(PT) 3/8 |

※ 15H is recommended for basic pad.  
※ 20H is recommended for bellows pad and for condition where a fast adsorption speed is required

#### ③ Pad diameter

|     |      |
|-----|------|
| 125 | Ø125 |
| 160 | Ø160 |
| 220 | Ø220 |

#### ④ Pad type

|     |         |
|-----|---------|
| Nil | Basic   |
| B   | Bellows |


#### ⑤ Material

|   |          |
|---|----------|
| R | NBR      |
| S | Silicone |

### Specifications

|                     |   |
|---------------------|---|
| Fluid               | Air                                     |
| Ambient Temperature | 0 ~ 60°C                                |
| Lubrication         | Not required                            |
| Operating pressure  | 1.0~6kgf/cm <sup>2</sup> (0.1 ~ 0.6MPa) |

### Dimensions

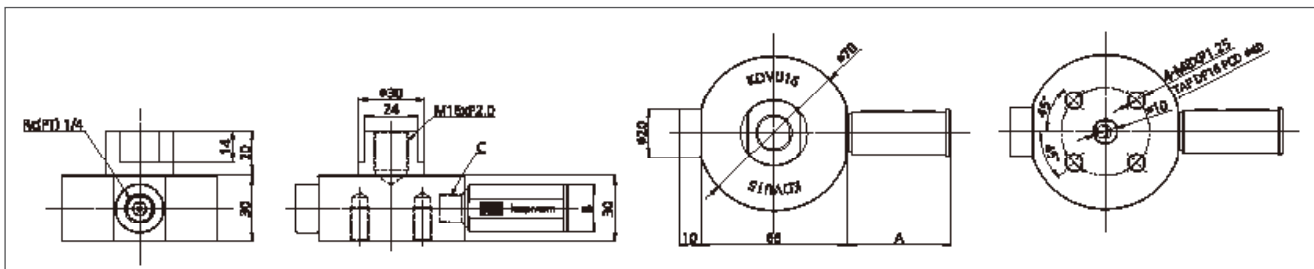

Unit:mm

| Model  | A  | B   | C          |
|--------|----|-----|------------|
| DVU15H | 47 | Ø21 | Rc(PT) 1/4 |
| DVU20H | 66 | Ø21 | Rc(PT) 3/8 |