

KVFL series



Features

- Compact type, space savings
- Easy mounting - Push-in connection $\varnothing 4, \varnothing 6$
- Easy maintenance
 - Transparent case: easy checking

How to order

KVFL - 88

①


① Tube size

44	$\varnothing 4$
66	$\varnothing 6$
88	$\varnothing 8$

Specifications

Model	KVFL-44	KVFL-66	KVFL-88
Fluid	Non-lubricated air / Non-corrosive gas		
Ambient temperature	0~60°C		
Operating pressure range	-95.9~0KPa		
Proof pressure	0.5MPa		
Port size	$\varnothing 4$	$\varnothing 6$	$\varnothing 8$
Filtration rate	15 μ m		
Suitable ejector nozzle diameter	less than $\varnothing 1.0$	less than $\varnothing 1.5$	less than $\varnothing 2.0$
Mass	19g	20g	37g

Maintenance parts



Element Reference	Applicable part
KVFL-44E	KVFL-44/66
KVFL-88E	KVFL-88




Filter kit Reference	Applicable part
KVFL-44K	KVFL-44
KVFL-66K	KVFL-66
KVFL-88K	KVFL-88




Holder Reference	Applicable part
KVFL-46H	KVFL-44/66
KVFL-81H	KVFL-88

Construction

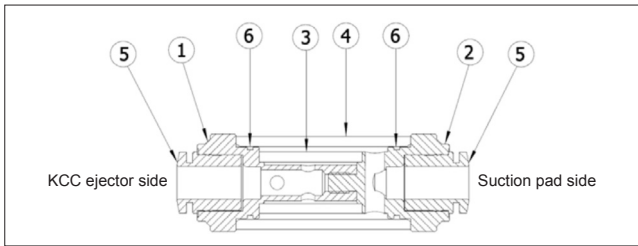

NO	Part name	Material
1	Body A	Aluminium
2	Body B	Aluminium
3	Element	PVF
4	Case	PA
5	Connector	-
6	O-ring	NBR

Dimensions

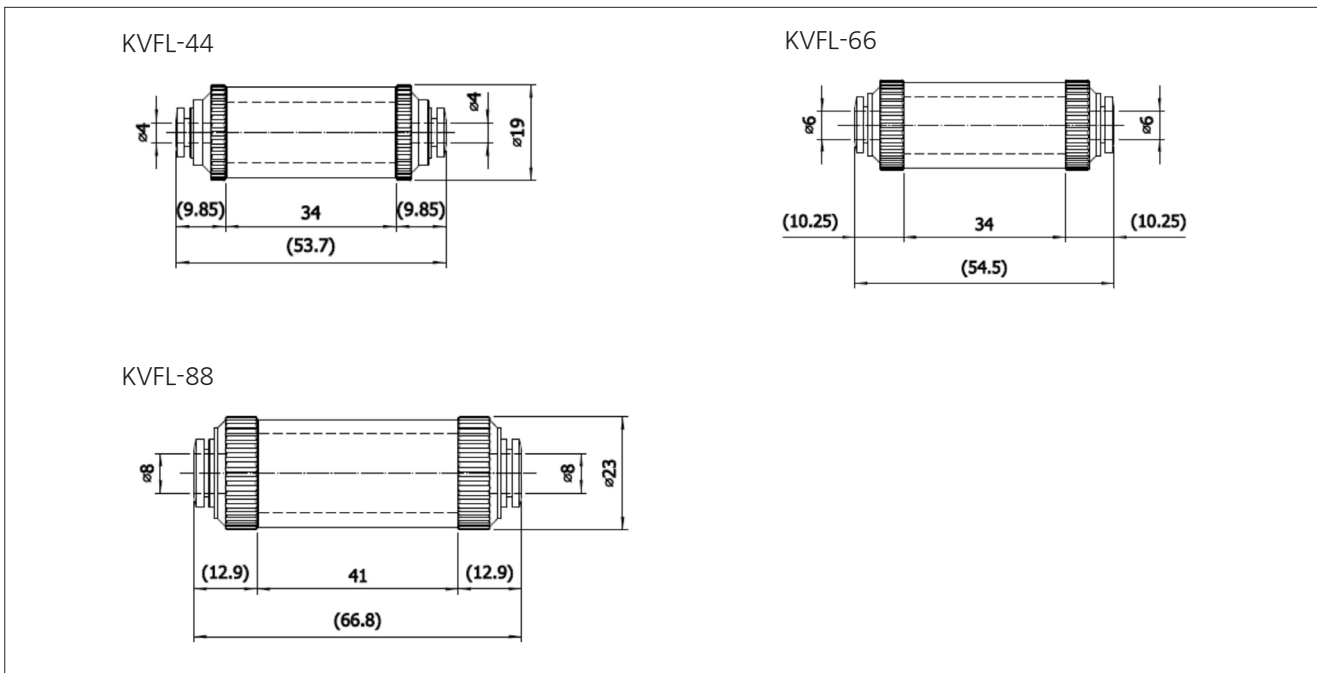

Dimensions - Holder

